

# TECHNICAL DATA

TAMPER

BVT 65




**Reliable and long lasting**

Engine protection, fuel filter, automatic oil level control



**More transparency**

Hour meter RPM-meter with service indicator (optional)

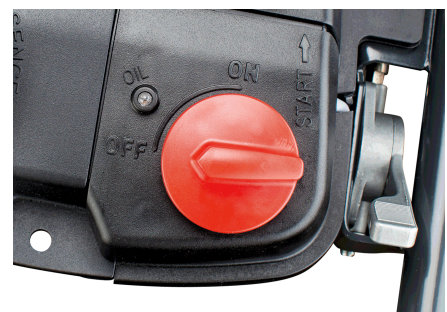


**Simple operation**

Engine and fuel supply with combined switch

**Shipping dimensions in m3**

**BVT 65** 0,262



**Standard Equipment**

- Engine Protection System
  - Protective engine covering
  - Automatic oil level control
  - Dual fuel filter system
- Vibration insulated steering bow
- Self-cleaning air filter housing
- Protective covering
- Single point lifting device
- Recoil starter
- Plastic castor as loading aid
- Infinitely variable frequency
- Combination of engine stop/fuel switch
- 3-2-1 Warranty

**Optional Equipment**

- Transport device with puncture proof wheels
- Tamper foot widths (160-330mm)
- Tamper foot extensions
- h-/ rpm meter
- Special painting
- Tool kit
- Service Kit
- TOUGH WARRANTY

**Dimensions in mm**

	B	H	L	L1	W
<b>BVT 65</b>	350	1030	728	335	280

**Technical Data**

**BOMAG**

**BVT 65**

**Weights**

Operating weight CECE .....	kg	67
Basic weight .....	kg	66

**Dimensions**

Working width (tamper plate) .....	mm	280
------------------------------------	----	-----

**Driving Characteristics**

Working speed max. ....	m/min	20
Area coverage max. ....	m <sup>2</sup> /h	336

**Drive**

Engine manufacturer .....	Honda
Type .....	GX 100
Emission stage .....	CARB Phase III
Cooling .....	air
Number of cylinders .....	1
Performance SAE J 1349 .....	kW 2,3
Fuel .....	gasoline
Drive system .....	mech.
Fuel comsump. aver. during operation .....	l/h 0,9

**Exciter system**

Frequency .....	Hz	10- 11,8
Impact force .....	kN	16,0

**Capacities**

Fuel .....	l	3,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 541 21 010

151215 Sa

**BOMAG**  
 Hellerwald  
 D-56154 Boppard  
 P.O. Box 5162  
 Tel. (0)6742 - 1000  
 Fax (0)6742 - 3090

